


URSA FP Basic

MW-EN 13162-T5-DS(70,90)-CS(10)15-TR7,5-WS-WL(P)-MU1-AFr10

Tvrde ploče od mineralne vune za korištenje u ETICS sustavima.

Toplinska i zvučna izolacija za kontaktne fasadne sustave proizvedene novom tehnologijom TECTONIC kojom se postiže najbolji omjer toplinske i zvučne izolacije i mehaničkih svojstava ploča.

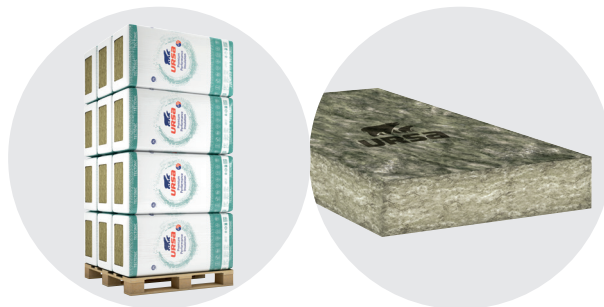

Tehničke informacije	Vrijednost	Standard
Koeficijent toplinske provodljivosti λ_D	0,035 W/mK	EN 13162
Klasa vatrootpornih svojstava	A1	EN 13501-1
Linearni otpor strujanju zraka r	$> 20 \text{ kPa s/m}^2$	
Tlačna čvrstoća kod 10% deformaciji	$Cs(10) \geq 15 \text{ kPa}$	SIST EN 826
Delaminacijska čvrstoća	$Tr \geq 7,5 \text{ kPa}$	SIST EN 1607
Dimenzijska stabilnost	70,90	SIST EN 1604
Dimenzijska tolerancija debljine	T5	SIST EN 823
Paropropustnost - difuzija vodene pare	MU1	SIST EN 12086
Upijanje vode metodom dugotrajnog uranjanja	WL(P)	SIST EN 12087
Kratkotrajna Vodoupojnost	WS	SIST EN 12087

Debljina [mm]	80	100	120	140
Širina [mm]	600	600	600	600
Dulžina [mm]	1200	1200	1200	1200
Toplotna upornost R_D ($\text{m}^2\text{K/W}$)	2,25	2,85	3,40	4,00


www.blauer-engel.de/uz132


Proizvod je certificiran u skladu s EN 13162.
EG certifikat sukladnosti broj.: 0672 – CPR – 0319.

MW – skraćena oznaka za mineralnu vunu

EN 13162 – broj europskog standarda

Ti – tolerancija debljine

Cs – tlačna čvrstoća kod 10% deformaciji

TRi – delaminacijska čvrstoća

WL (P) – upijanje vode metodom dugotrajnog uranjanja

MU1 – difuzija vodene pare

AFi – linearni otpor strujanju zraka

